

Handheld PA Systems

EUROPORT EPA150

EUROPORT – Ultra-Compact 150-Watt 5-Channel Portable PA System with Digital Effects and FBQ Feedback Detection

- Ultra-compact 2 x 75-Watt, 5-channel portable PA system in a briefcase format
- System sets up in seconds—perfect for entertainment, multi-media presentations, press conferences, board meetings, etc.
- Enormous power, incredible sonic performance and super-light weight
- Studio-grade 24-bit stereo FX processor with 100 awesome presets including reverb, chorus, flanger, delay, pitch shifter and various multi-effects
- Revolutionary FBQ Feedback Detection system instantly reveals critical frequencies for easy feedback removal
- 2 “Invisible” mic preamps with phantom power for condenser microphones, 1 mic/inst channel and 1 stereo channel with separate CD input
- Stereo 7-band graphic EQ allows precise frequency correction of main outputs
- Comes with one BEHRINGER XM1800S microphone, mic clip and cable
- Compact speakers contain powerful 4" woofers and a 1" tweeter, 17 mm stand insert suitable for use with standard microphone stand and come with 12' cables
- Integrated storage compartment for microphone, cables, and accessories
- “Planet Earth” switching power supply for maximum flexibility (100 - 240 V~), noise-free audio, superior transient response plus low power consumption for energy savings
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

behringer.com



Sometimes you just don't need a large, complicated PA system to get your message across. In fact, you might not need a big system at all! For those occasions when you do need to get your voice above the crowd, such as a company meeting, a picnic or party, the EPA150 brings that extra volume, along with all the accessories you'll need, in a convenient, easy to carry and setup package. And the good news is you don't have to be a sound engineer to run it!

Lots of Connections

The EPA150 comes ready for your input, literally. Channels 1 and 2 accept balanced XLR mics, as well as balanced and unbalanced ¼" line sources, such as electronic keyboards and the like. An acoustic or electric guitar can be connected directly via Channel 3's Mic/Inst input. Want to play some of your favorite tunes at the picnic? Just plug a CD/MP3 player into the Channel 4/5 RCA jacks and crank it up!

Continued on next page



EUROPORT EPA150

Superb Sound Quality

A great deal of engineering went into the design of the EPA150. Since we already make some of the best-sounding audio mixers, amplifiers and loudspeakers on the planet, it should come as no surprise that the EPA150 provides far superior sound quality than other products in this class. The satellite loudspeakers feature twin custom-designed 4.0" woofers and a 1.0" tweeter for incredible fidelity and clarity that belies their small size.


Loaded With Features...

And we mean truly professional features: long-throw faders, instead of rotary controls for precise level adjustments; active 3-band channel EQ, for exceptional tone control of signal sources; phantom power, so you can use studio-grade condenser mics; a 7-band stereo graphic EQ, to adjust overall system response; and our state-of-the-art FBQ Feedback Detection System, to track and eliminate those annoying mic squeals.

The Sweet Sound of Reverb, or Delay, or...

If you're making a speech, chances are you won't need it, but if you're playing a musical instrument and/or singing, you might want to add some effects. So, we've included a 24-bit stereo FX processor with 100 great-sounding presets including reverb, chorus, flanger, delay, pitch shifter and various multi-effects to sweeten your performance.

Continued on next page

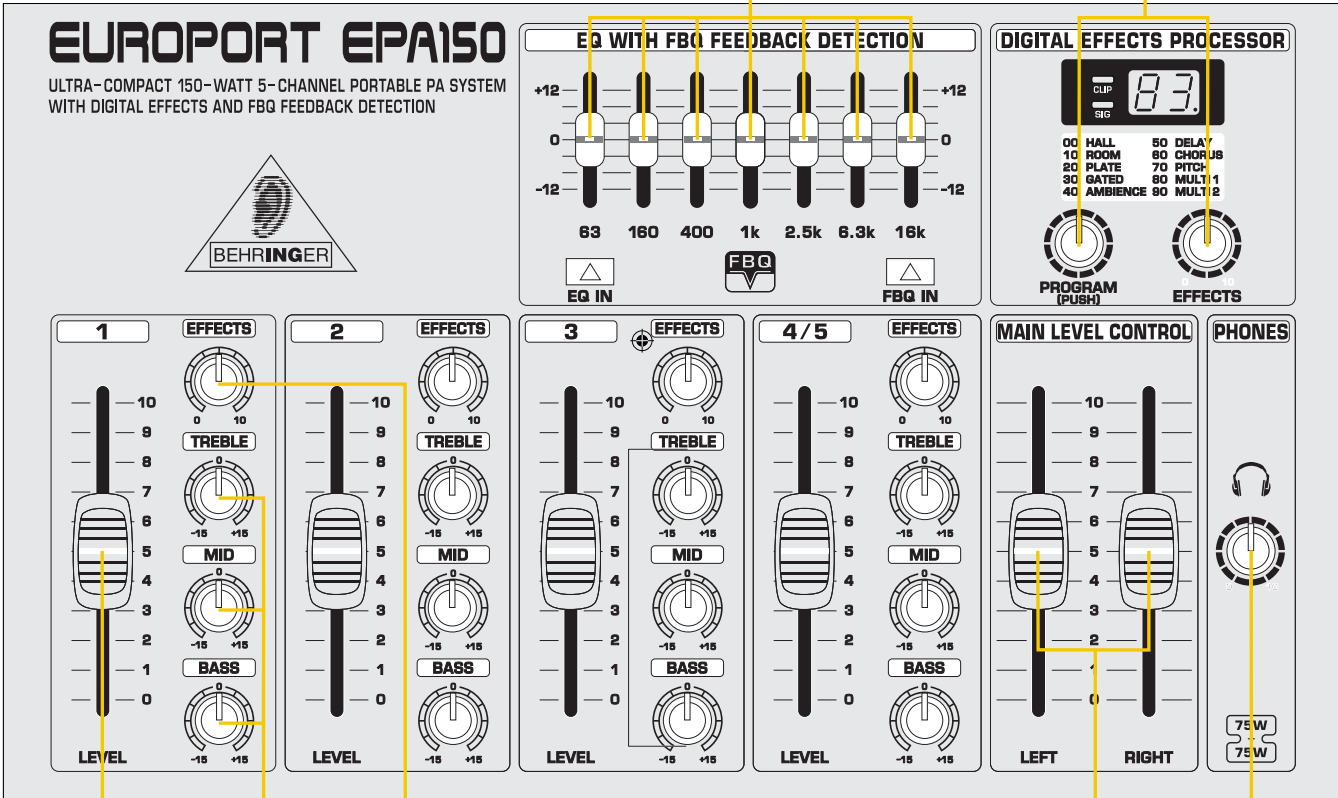

7-band stereo graphic EQ with FBQ Feedback Detection

Built-in stereo digital FX processor with 100 presets

EUROPORT EPA150
ULTRA-COMPACT 150-WATT 5-CHANNEL PORTABLE PA SYSTEM WITH DIGITAL EFFECTS AND FBQ FEEDBACK DETECTION



EQ WITH FBQ FEEDBACK DETECTION
+12 0 -12
63 180 400 1k 2.5k 6.3k 16k
EQ IN FBQ IN

DIGITAL EFFECTS PROCESSOR
CLIP SIG 83
00 HALL 50 DELAY
10 ROOM 60 CHORUS
20 PLATE 70 PITCH
30 GATED 80 MULTI 1
40 AMBIENCE 90 MULTI 2
PROGRAM (PUSH) EFFECTS

1 **EFFECTS** **2** **EFFECTS**
TREBLE MID BASS
LEVEL

3 **EFFECTS** **4/5** **EFFECTS**
TREBLE MID BASS
LEVEL

MAIN LEVEL CONTROL **PHONES**
LEFT RIGHT
75W 75W

Channel Level fader

Channel EQ (Bass, Mid and Treble)

Effects wet-dry ratio

Main Level faders

Headphones Level

EUROPORT EPA150

Everything You Need


The EPA150 is a complete system. Just set up the main unit on a tabletop, deploy the speakers and connect them with the included cables. Connect the high-quality XM1800S microphone (we've even included a long mic cable and mic stand clip) and hit the power switch—voilà, instant PA system! When you are done, just stow the mic and all accessories in the onboard storage compartment.

Value

When you compare the sound quality, features and price to the competition, we think you will agree the EPA150 provides extreme value as a complete, portable PA solution.




Briefcase-style format for easy transport, only 26.4 lbs / 12kg

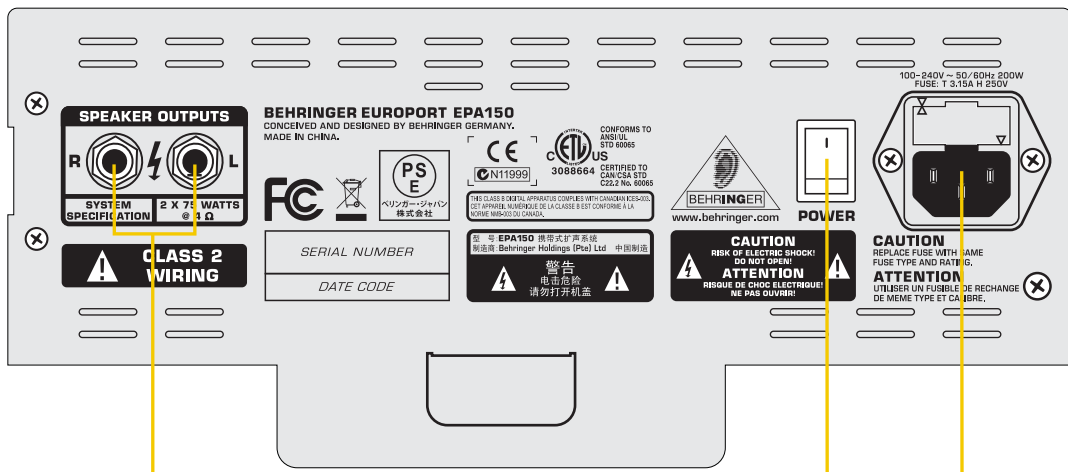

1/4" Speaker Output jacks

Power switch

IEC power socket

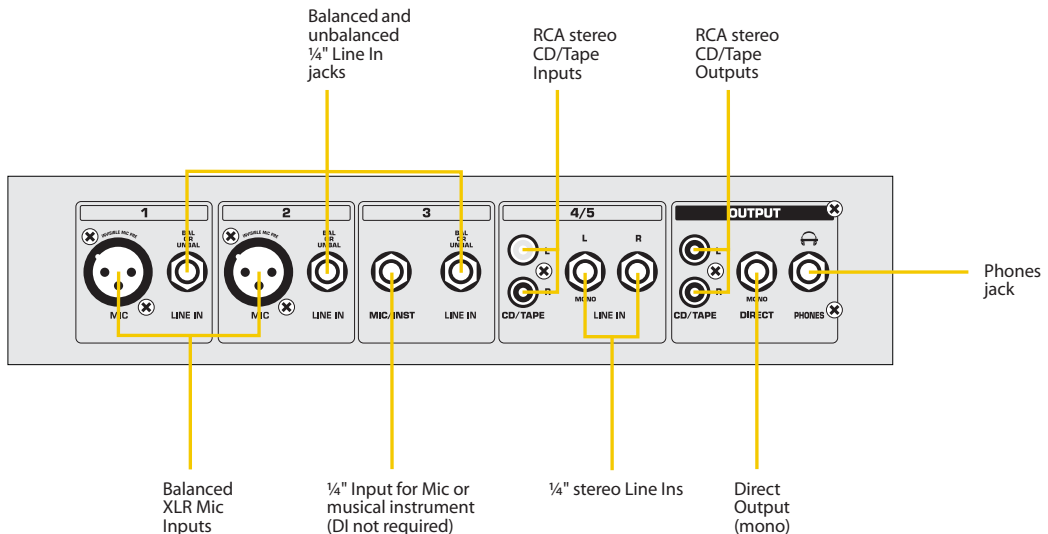

Balanced XLR Mic Inputs

1/4" Input for Mic or musical instrument (DI not required)


1/4" stereo Line Ins

Direct Output (mono)


Phones jack

EUROPORT EPA150

Live Performance with Backing Tracks

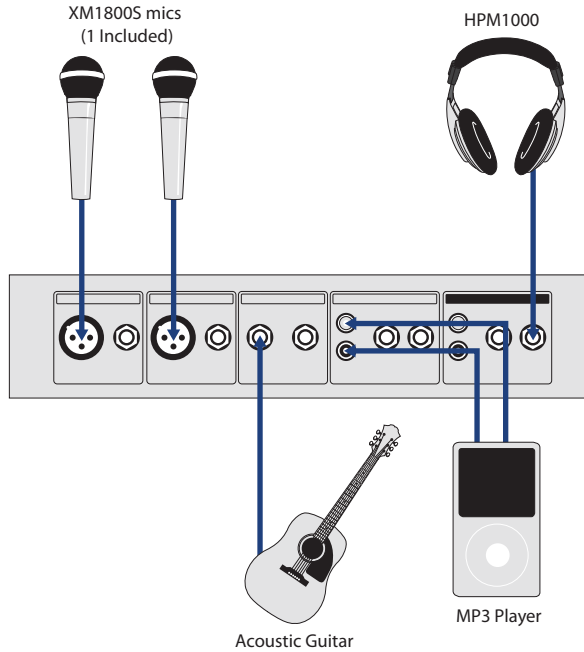

Business Presentation Setup

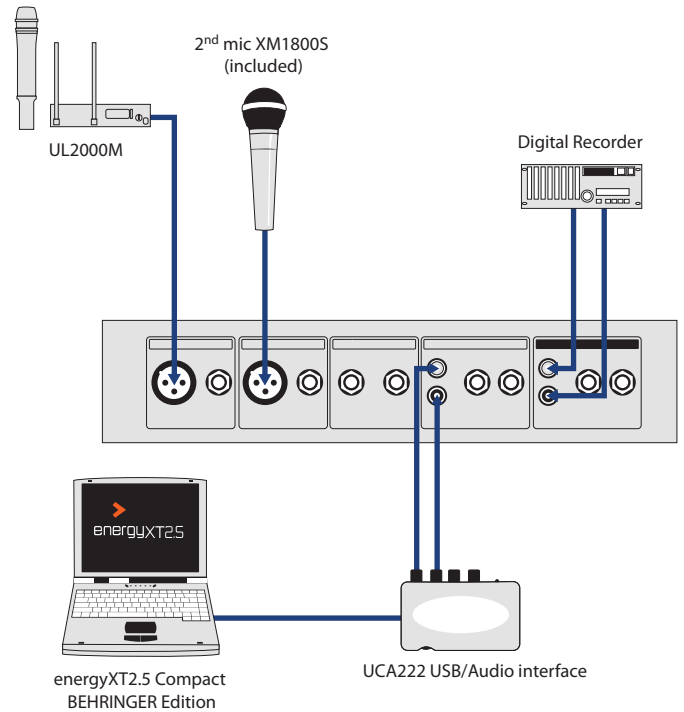

Mixer section

Inputs	XLR, 1/4" balanced, 1/4" unbalanced, RCA
Outputs	RCA, 1/4" unbalanced mono, 1/4" TRS stereoSpeaker

Amplifier

Output power	75 W per stereo channel @ 4 Ω
Frequency response	40 Hz to 25 kHz
Distortion	<0.8% THD rated output
Signal-to-noise ratio	85 dB
Outputs	1/4" speaker outputs L/R

Speakers

Woofer	4.0" / 112 mm
Tweeter	1.0" / 25 mm

Power Supply

Voltage (Fuses)	120 V, 60 Hz (T 3.15 A H 250 V)
	240 V~, 50 Hz (T 3.15 A H 250 V)
	230 V~, 50 Hz (T 3.15 A H 250 V)
	100 V~, 50-60 Hz (T 3.15 A H 250 V)
Power consumption	max. 200 Watts
Mains connection	Standard IEC receptacle

Dimensions/Weight

Dimensions (HxWxD)	approx. 13.8 x 24.1 x 7.3" approx. 353 x 613 x 186 mm
Weight	26.4 lbs / 12 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

For service, support or more information contact the BEHRINGER location nearest you:

Europe Tel.: +49 2154 9206 4149, Fax: +49 2154 9206 4199
USA/Canada Tel.: 1 425 672 0816, Fax: +1 425 673 7647
Singapore Tel.: +65 5845 1800, Fax: +65 6214 0275

Australia Tel.: +61 3 9877 7170, Fax: +61 3 9877 7870
Japan Tel.: +81 3 5281 1180, Fax: +81 3 5281 1181



©2010 Red Chip Company Ltd. Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. All trademarks (except BEHRINGER, the BEHRINGER logo, EUROPORT and FBQ) mentioned belong to their respective owners, and such use neither constitutes a claim of the trademarks by Behringer nor affiliation of the trademark owners with Behringer. EnergyXT2.5 and the energyXT logo are trademarks of XT Software AS. BEHRINGER accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. 985-10000-00442

behringer.com